


NEMO[®] Beverage Pumps Smooth Pumping at Universal Use

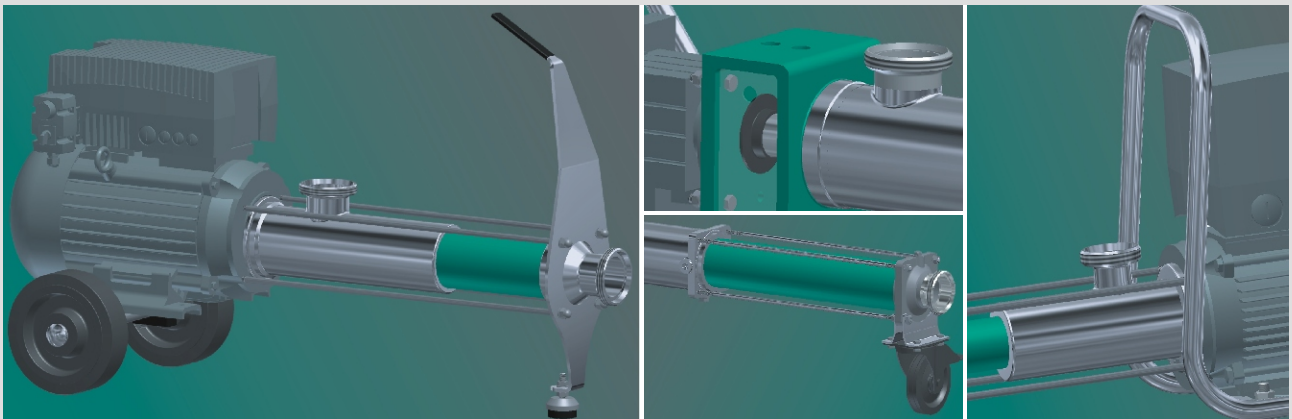

NEMO[®] Beverage Pumps

Features and Product Program Overview

Universal Use

The strength of the new NEMO[®] Beverage Pump is the universal use in wine-growing, wine production, sweet must production, breweries, distilleries and in beverage production.

Wide Range of Applications

The pumps are specifically used for products with the following characteristics:

- Low to high viscosity
- Shear-sensitive
- High solids content (such as fruit pulp and stone fruit) and free of solids

Large Range of Capacities and Pressures

- Capacities from 130 up to 8,450 gph or 0.05 up to 32 m³/h
- Differential pressure of 0 up to 90 psi / 6 bar


Advantages

- Smooth and reliable pumping due to low pump speed
- Infinitely variable flow rate by integrated speed control in the drive by a frequency inverter
- Portable and mobile version provides flexibility
- Variable, modular design
- Contact parts completely in CrNiMo steel
- Stator in food quality (BfR)
- Connections according to DIN 11851 or Tri-Clamp connections and a variety of other local connections are available
- High suction capability
- Service-friendly

These advantages guarantee smooth and reliable pumping of fluids such as mash, raw products, concentrates, fruit and vegetable juices, nectar, sugar solution, syrup, whole grapes, must, sludge, yeast and wine.


NEMO[®] Beverage Pump NM021

- Portable version
- Capacities from 130 up to 1,320 gph / 0.5 up to 5.0 m³/h
- Power 1 HP
- Connections 1.5" Tri-Clamp

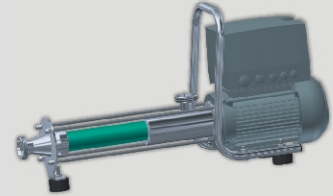


NEMO[®] Beverage Pump NM031

- Mobile version
- Capacities from 400 up to 3,400 gph / 1.5 up to 13 m³/h
- Power 3 HP
- Connections 2" Tri-Clamp

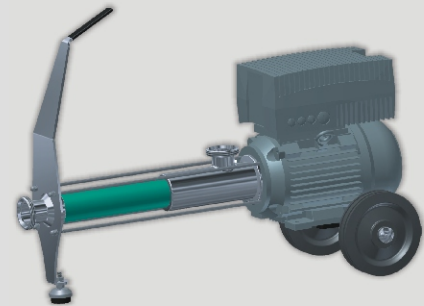


NEMO[®] Beverage Pump NM041

- Mobile version
- Capacities from 400 up to 3,400 gph / 1.5 up to 13 m³/h
- Power 5 HP
- Connections 2.5" Tri-Clamp

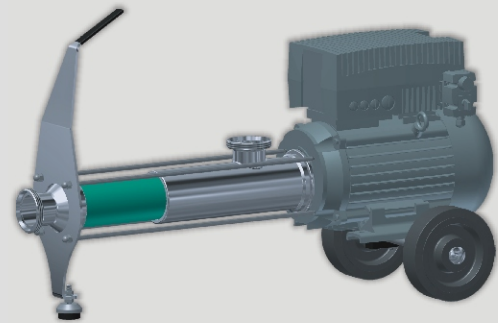

NEMO[®] Beverage Pump NM051

- Mobile version
- Capacities from 400 up to 8,450 gph / 1.5 up to 32 m³/h
- Power 7.5 HP
- Connections 3" Tri-Clamp

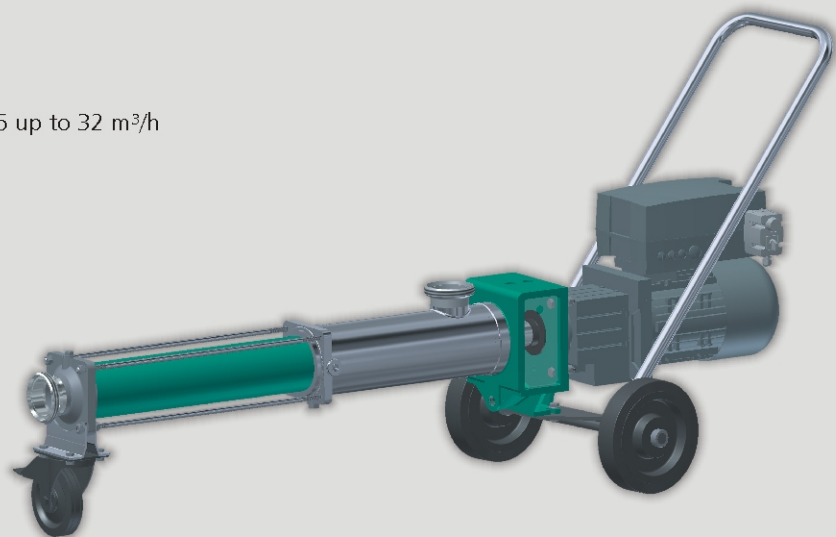

www.netzsch.com

NETZSCH Pumps North America, LLC
119 Pickering Way
Exton, PA 19341
USA
Phone: 610 363-8010
Fax: 610 363-0971

E-mail: npa@netzsch.com
www.netzsch.com

NETZSCH Canada, Incorporated
740 Huronia Road, Unit 10
Barrie, ON L4N 6C6
Canada
Phone: 705 797-8426
Fax: 705 797-8427

E-mail: ntc@netzsch.com
www.netzsch.com
